

SOFTCOOKER SR BI WI-FOOD

sous vide cooking system



SOFTCOOKER SR BI 1/1 WI-FOOD



SOFTCOOKER SR BI 2/3 WI-FOOD



Spinotto ermetico IP 67
IP 67 hermetic connector



Pratica staffa per display
The practical bracket for the
display box

- Apparecchio da incasso per la cottura a bassa temperatura con riscaldamento statico dell'acqua.
- Struttura, vasca e coperchio in acciaio inox.
- Potenti resistenze corazzate a contatto nel fondo della vasca.
- Controllo touch Wi-Food con delta T di 0,2°C.
- Utilizzabile tramite APP gratuita, scaricabile sia per sistema Android che iOS.
- Pratica staffa di posizionamento per la scatola display permette, tramite sistema magnetico, di posizionare i comandi dove risultano più comodi e accessibili.
- 10 programmi memorizzabili sulla macchina e infiniti tramite APP.
- Temperatura selezionabile in C° e F°.
- Spinotto ermetico IP 67 per eventuale rimozione del blocco comandi in operazioni di pulizia o tempi morti.
- Coperchio vasca con maniglia a scomparsa.
- Kit collegamento scarico acqua opzionale.

- Built-in device for cooking at low temperature with static heating of the water.
- Structure, tank and lid made of stainless steel.
- Powerful armoured contact heating elements in the bottom of the tank.
- Wi-Food touch control with 0.2°C T delta.
- Can be used through a free app, downloadable for both the Android and iOS systems.
- The practical positioning bracket for the display box allows for placing the controls – by means of a magnetic system – in the most comfortable and accessible location.
- Up to 10 programmes storable on the machine and many more through the APP.
- Temperature settable in °C and in °F.
- IP 67 hermetic connector for removing the control block during cleaning operations or idle periods.
- Tank lid with recessed handle.
- Optional water discharge device connection kit.




INDUSTRIA 4.0

Optional



Kit collegamento scarico acqua
Water discharge device
connection kit

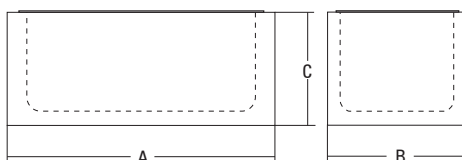

							A	B	C			
	watt		°C	lt	lt	mm	mm	mm	mm	kg	mm	kg
Softcooker SR BI 2/3 Wi-Food	2.000	1ph	24 ÷ 95 75,2 ÷ 199,9 F°	19	17	350x320	400	370	300	5.5	600x500x420	9.5
Softcooker SR BI 1/1 Wi-Food	2.000	1ph	24 ÷ 95 75,2 ÷ 199,9 F°	29	25	520x320	575	370	300	16.5	600x500x420	20.5