

CM 650 Split



FROZEN DICE



Modular ice maker 300 kg - Sprayer system

• Position n°




• Application fields

Hotel	● ● ● ● ● ● ● ●	Fish market	● ● ● ● ● ● ● ●
Restaurant	● ● ● ● ● ● ● ●	Supermarket	● ● ● ● ● ● ● ●
Fast food	● ● ● ● ● ● ● ●	SPA	● ● ● ● ● ● ● ●
Bar	● ● ● ● ● ● ● ●	Medical	● ● ● ● ● ● ● ●
Disco	● ● ● ● ● ● ● ●	Industry	● ● ● ● ● ● ● ●

• Features & Plus

- Full cube, compact and crystalline
- External structure AISI 304 Scotch Brite
- Electromechanical functioning
- ON-OFF switch
- Standard and special voltages
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- Stackable unit

• Available dice size

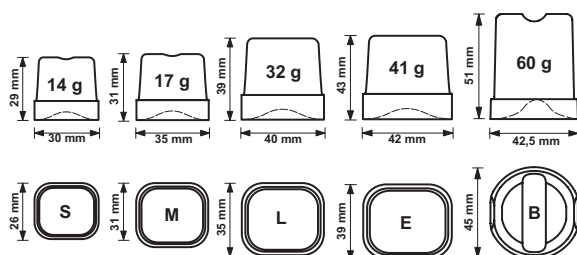

• Usable Bins

- Bin T830

**2 Years
Warranty**

subject to limitations

• Certifications available for this model



N.T.F. S.r.l. Nuove Tecnologie del Freddo

Via dell'Industria 10/B
20020 Villa Cortese (MI), Italy

tel. +39 0331 436217
fax +39 0331 436218

www.ntfice.it
info@ntfice.it



ntfice.it




CM 650 Split



FROZEN DICE



Modular ice maker 300 kg - Sprayer system

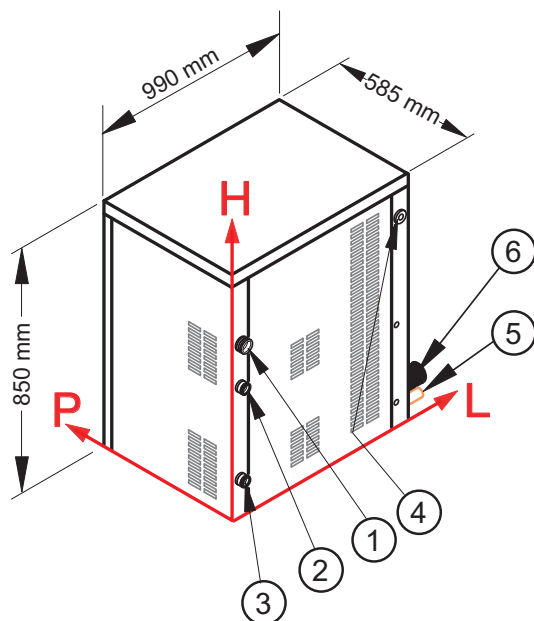

• Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:
39 mm - 582 mm - 3/4"
- ② Water outlet:
31 mm - 440 mm - 24 mm
- ③ Water outlet:
29 mm - 73 mm - 24 mm
- ④ Electrical connection:
962 mm - 748 mm

• Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

• Technical information

Production in 24h	300 kg
Kind of cube	14-17-32-41-60 g
Refrigerant	R404A - R507
Refrigerant capacity	6000 W (evap. temp: cycle start -12° C, cycle end -28° C)
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	200 W
Sizes (L-P-H mm)	990 - 585 - 850
Sizes with pack (L-P-H mm)	1075 - 705 - 1020
Net weight	97 kg
Gross weight	107 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:



Standard
Cube (17 g)



6000 W
(evap. temp:
cycle start
-12° C, cycle
end -28° C)



Water
temperature
+15° C



Electrical
consumption
at +43° C
(standard
voltage)

Models and specifications are subject to change without notice
Rev. 00 - Issued January 2017



N.T.F. S.r.l. Nuove Tecnologie del Freddo

Via dell'Industria 10/B
20020 Villa Cortese (MI), Italy

tel. +39 0331 436217
fax +39 0331 436218

www.ntfice.it
info@ntfice.it



ntfice.it

