



Self-contained ice maker - Sprayer system Daily production up to 25 kg

Hotel									
Restaurant									
Fast food									
Bar									
Disco									
Fish market									
Supermarket									
Medical & SPA									
Industry									

► Position n°



► Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Cleanable antiscall filter
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltages
- Patented sprayer slide
- Suitable for embedment



AISI 304 SS Scotch
Brite finish



Cleanable antiscall
filter



Disappearing insulated
door



Patented sprayer slide

► Available ice cube size



► Prod. 24h

	Air temp.		Water temp.		kg	lbs
10° C	50° F	7° C	45° F		25	55
21° C	70° F	15° C	60° F		22	49

2 Years Warranty
subject to limitations

► Certifications available for this model






Ice Cube

IC 18



Self-contained ice maker - Sprayer system Daily production up to 25 kg

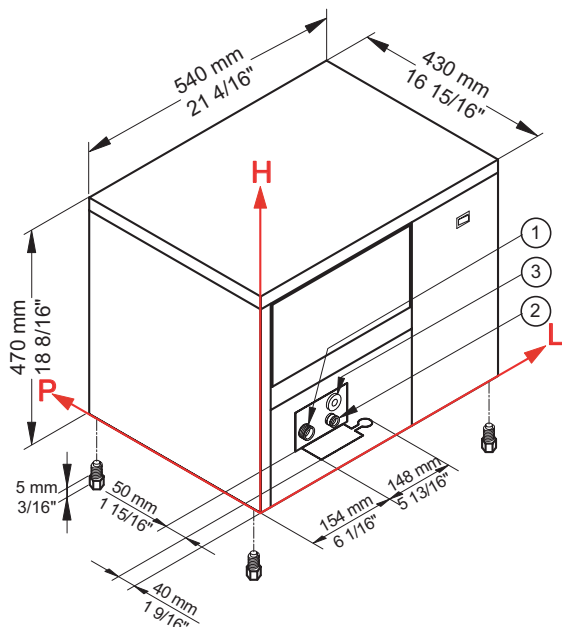

► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	25 kg					
	50° F		55 lbs				
	21° C			22 kg			
	70° F				49 lbs		
	32° C					18 kg	
	90° F						40 lbs

► Connections

All measures are referred to the rear bottom-left corner

① Water in.: 3/4" Ø

② Water out.: 24 mm / 15/16" Ø

③ Electrical connections

► Technical information

Production in 24h 22 kg / 49 lbs

Store capacity, up to 4 kg / 9 lbs

Cooling system A

Kind of cube D-13g

Refrigerant R404A - R452A

Standard voltage 220-240 V ~ 50 Hz

Average power consumption 320 W

Fuse 10 A

Water consumption A: 4,5 l/kg - 53,9 gal/100 lbs

Sizes (L-P-H mm) 540 - 430 - 470

(L-P-H in) 21 4/16 - 16 15/16 - 18 8/16

Sizes with pack (L-P-H mm) 590 - 490 - 640

(L-P-H in) 23 4/16 - 19 5/16 - 25 3/16

Net weight 34 kg / 75 lbs

Gross weight 39 kg / 86 lbs

Finish AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

Sizes without feet

Standard Cube (13 g)

Ambient temperature +21° C

Water temperature +15° C

Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 04 - Issued September 2019



www.bremaice.it
info@bremaice.it

Bim + Data
download

